


LED BULB SERIES

Standard Case

MB LED Series

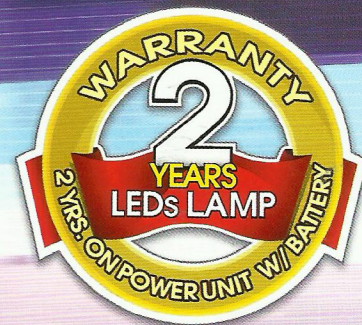

MB - LD

Specification

- Mode of Operation : Non - Maintained
- Lamp : MR-16-LED with 180° adjustable sets and plastic-cover anti-dust
- Main Supply : AC 220 Volt, 50 Hz, $\pm 10\%$ Single Phase
- Construction : Electro-Galvanized steel sheet 1 mm. with epoxy powder and stove enamel coated anti-rust corrosion proof or **Standard ABS casing**
- Battery : Sealed lead acid battery, based on ISO 9001, ISO 14001 certified and UL
- Charger : Solid state system automatic battery charger
: Constant voltage charging systems
: **Switching regulated transformer**
- Charging Period : 14-20 Hours
- Safety Features : • Low - High voltage cut-off, preventing battery over discharge and recharge
• AC fuse - preventing short circuit and overload for main incoming AC 220 Volt
• DC fuse - preventing short circuit and charging & load

MB Series Dichroic LED type (LD)

MODEL	BATTERY	BULBS		DIMENSION L x W x H (cm)	DURATION (Hrs-Mins)	WEIGHT (kgs)
		LED (Wattage)	EQUIVALENT TO (HA) - Wattage			
MB 04-3 LD	12V. 5.0Ah.	2 x 3w.	2 x 15-20w.	29.5 x 8.5 x 28	9.0	3.6
MB 04-9 LD		2 x 9w.	2 x 45-50w.		3.0	

